




# SF DIAMOND CO., LTD

SF DIAMOND CO., LTD (SFD for short) could supply PCD Dies, Semi-finished Dies for drawing ferrous and non-ferrous wires, and SFD just use SFD PCD DIE BLANKS only. Our product meets the highest quality standards in the industry.

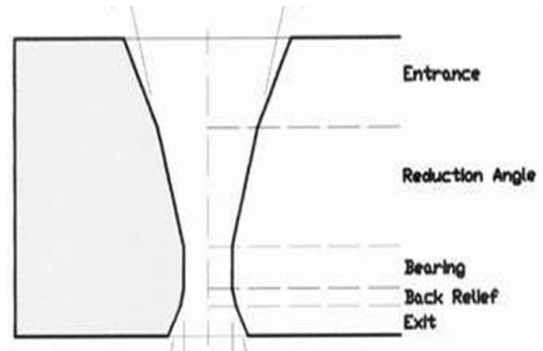

## The Selection Of SFD PCD Die Blanks

Hole (mm)	Hole (Inch)	PCD Blank	ADDMA
0.100-0.400	0.0039-0.0157	CD210	D6
0.200-1.000	0.0079-0.0394	CD315, CD415	D12
0.500-1.500	0.0197-0.0591	CD525, CD423	D15
0.800-2.000	0.0315-0.0787	CD535, CD429	D18
1.200-3.100	0.0472-0.1220	CD740, CD638SP	D21
1.500-4.400	0.0591-0.1732	CD953, CD653SP	D24
3.300-5.800	0.1299-0.2283	CD1285SPX	D27
5.100-7.600	0.2008-0.2992	CD1212SPX	D30
6.500-9.000	0.2559-0.3543	CD1512SPX	D30
8.000-11.000	0.3150-0.4331	CD1515SPX	D33
8.000-11.200	0.3150-0.4409	CD1813SPX	D30
8.000-12.000	0.3150-0.4724	CD1815SPX	D33
8.000-12.500	0.3150-0.4921	CD1817SPX	D33
8.000-12.700	0.3150-0.5000	CD1818SPX	D36
8.000-13.000	0.3150-0.5118	CD2516SP	D36+
8.000-14.000	0.3150-0.5512	CD2518SP	D36+
8.000-14.500	0.3150-0.5709	CD2520SP	D36+
8.000-15.000	0.3150-0.5906	CD3018SP	D36+
8.000-16.000	0.3150-0.6299	CD3020SP	D36+

\*Hole sizes for "Soft" Nonferrous Wire. Hard Wire should not exceed 65% of this diameter.